


IQMASTER

(IQ6400)



MAIN FEATURES :

- **75MHz-6GHz Vector Signal Transceiver (VST) based on Radio Unit SoC Technologies**
- **Turnkey solution for IQSTAR measurement software**
- **Dedicated firmware to run the VST like a benchtop instrument grade solution**
- **Measurement of RF Power Amplifier in base station-like conditions**
 - LTE/5G PA Tests with signal generation and analysis bandwidth up to 400MHz
 - 1-tone measurements: CW and pulsed CW characterization with configurable rise/fall time
 - 2-tone measurements for video bandwidth analysis
 - IQ signal generation and analysis with Digital Predistortion capabilities - Acquisition averaging up to 8192 in IQ modulation mode for high dynamic range characterization
- **Trigger and 10 MHz IN/OUT available to connect power meters, multimeter or spectrum analyzer**
- **High data transfer rate (Gigabit LAN interface)**

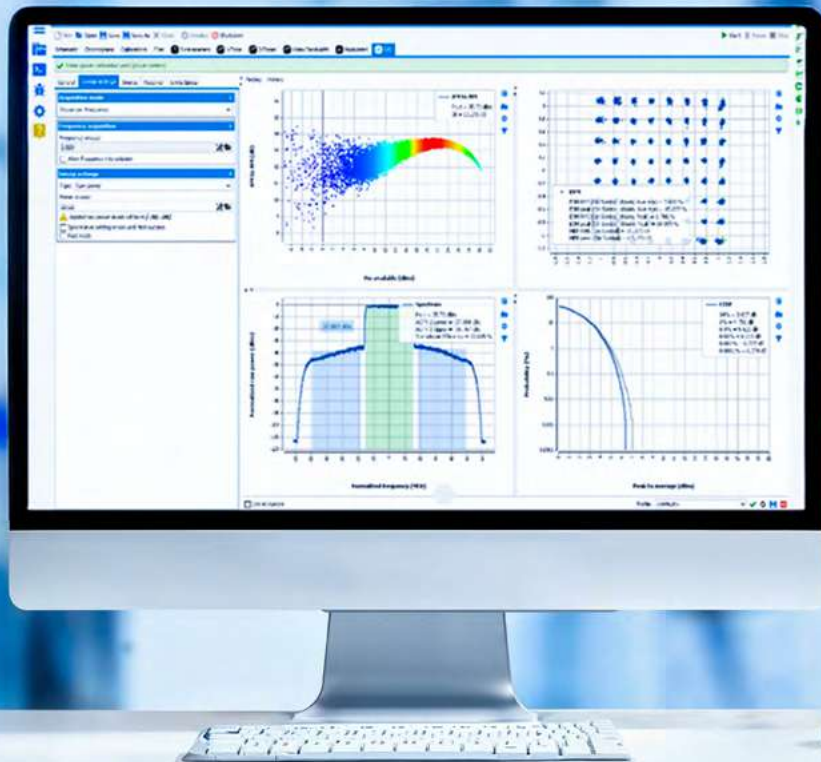

Specifications Table

GENERAL SPECIFICATIONS		
Frequency range	75MHz to 6GHz	
Harmonics	Rejected by external low pass filter	
Frequency accuracy	± (Output frequency × 61.5ppm + 1.832)	
RF OUTPUT PORT		
RF output port connector	SMA female, 50 Ω nominal	
RF Output port max. reverse input power level	+15dBm	
RF Output port max. DC voltage input level	TBD	
RF Output port setting level range	130dB relative to max power	
RF Output port level accuracy	Power Level = max power - 6dB	< ± 0.15dB
	Overall power range	< ±1dB
RF Output port setting resolution	0.01 dB	
RF INPUT PORT		
RF Input port (ORx1)	Connector	SMA female, 50 Ω nominal
	Max. safe input power level	+17 dBm
	Damage input power level	+23 dBm (peak)
	Max. DC voltage input level	+30V
	RF Input port level accuracy	NA (uncalibrated)
INPUTS AND OUTPUTS		
REF OUT	BNC female, 50 Ω nominal Output level: +5dBm ± 1dB (square waveform)	
REF IN	Frequency: 10MHz ± 61.5 ppm BNC female, 50 Ω nominal Input level range: -15 to +13dBm (sine or square waveform)	
TRIG IN	Frequency: 10MHz Lock range: ± 30 ppm BNC female, >100 kΩ nominal Accepts +3.3V TTL Vhigh min: +2.0V Min. pulse width: 20 ns	
TRIG OUT 1, TRIG OUT 2, TRIG OUT 3	BNC female, 30 Ω nominal +3.3Vpp into >100 kΩ +2.0Vpp into 50 Ω	
DIMENSIONS AND WEIGHT		
Dimensions	85 mm (H) × 460 mm (L) × 300 mm (W)	
Weight	5.54 kg	
Environmental conditions		
Altitude up to 2000m, Temperatures: 5 to 40°C, Maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% relative humidity at 40°C.		

Specifications Table

Vector Signal Generator and Vector Signal Analy		
Sampling rate	122.88MSa/s, 245.76MSa/s, 491.52MSa/s	
Capture depth	64MSa, 136ms @ 491.52MSa/s	
Maximum signal generation and analysis bandwidth	Center frequency	
	75 MHz – 526 MHz	100 MHz
	526 MHz – 5835 MHz	400 MHz
	5836 MHz – 5948 MHz	200 MHz
	5948 MHz – 6000 MHz	100 MHz
Waveform transfer rate	Read	87.5MB/s
	Write	62.5MB/s
Triggering	Internal, External, Free Run	

1-tone CW and pulsed modes		
Sampling rate (only applicable with 1-tone pulsed mode)	122.88MSa/s, 245.76MSa/s, 491.52MSa/s	
ON/OFF ratio	> 80dB	
Pulse period ¹	wMin.	1.83 μs
	Max.	17.47 s
Pulse width ¹	Min.	32.55 ns
	Max.	17.47 s
Pulse delay ¹	Min.	0 ns
	Max.	8.74 s
Rise/fall time ¹	Min.	8.14 ns
	Max.	66 μs
Resolution ¹ (applicable to period, width, delay, rise/fall time)	4.07 ns	

2-tones mode		
Frequency spacing	Center frequency	
	75 MHz – 526 MHz	100 kHz to 100 MHz
	526 MHz – 5835 MHz	100 kHz to 400 MHz
	5836 MHz – 5948 MHz	100 kHz to 200 MHz
	5948 MHz – 6000 MHz	100 kHz to 100 MHz
Frequency resolution between tones	57 mHz	
Tone power range	95dB below average output power	

¹ Data specified with 491.52MSa/s sampling rate, other values can be reach with differentsampling rates


Mechanical Dimensions

- **Dimensions: 85 mm (H) x 460 mm (L) x 300 mm (W)**
- **Weight : 5.54 kg**




Typical Performances

Maximum CW source output power:

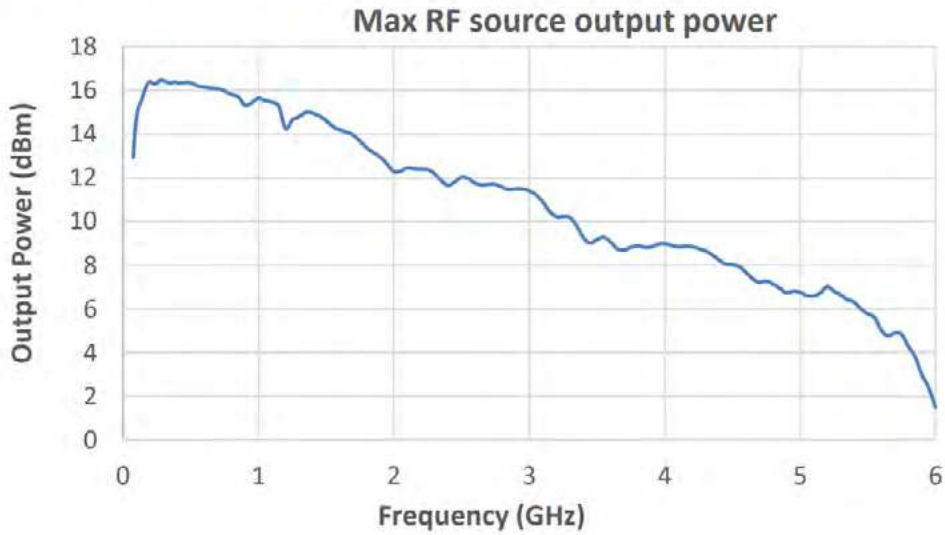


Maximum CW RF source output power vs frequency

General performances: 75MHz – 6GHz

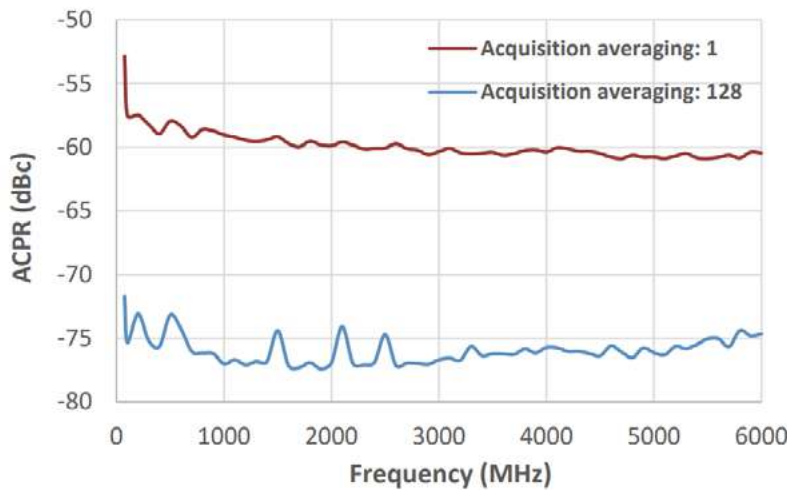

General performances vs. frequency with 20MHz bandwidth 10dB PAPR Source power -15dBm @122.88MSa/s

Typical Performances

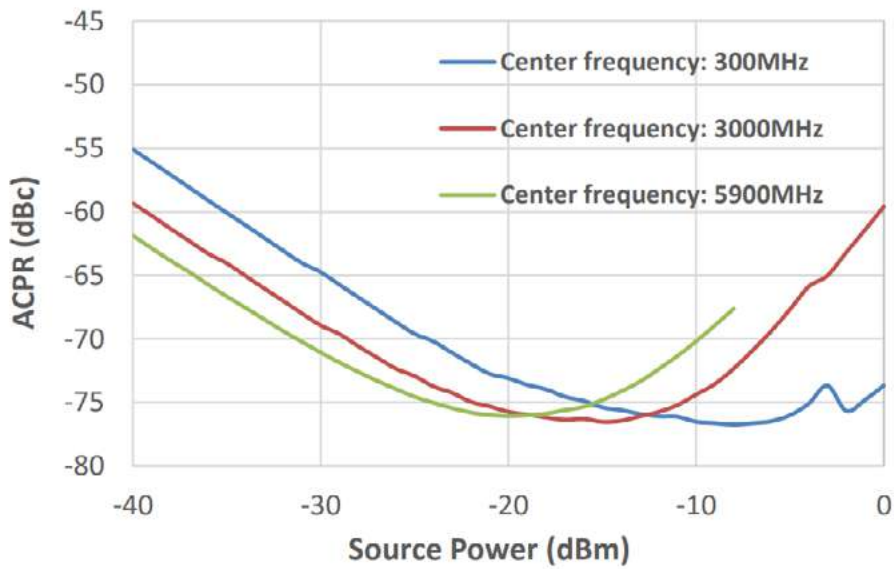


General performances vs. source power at 300MHz, 3GHz and 5.9GHz with 20MHz bandwidth 10dB PAPR @122.88MSa/s


Note: RF output loopback to RF input .
Acquisition averaging set to 128.




LTE Typical Performances

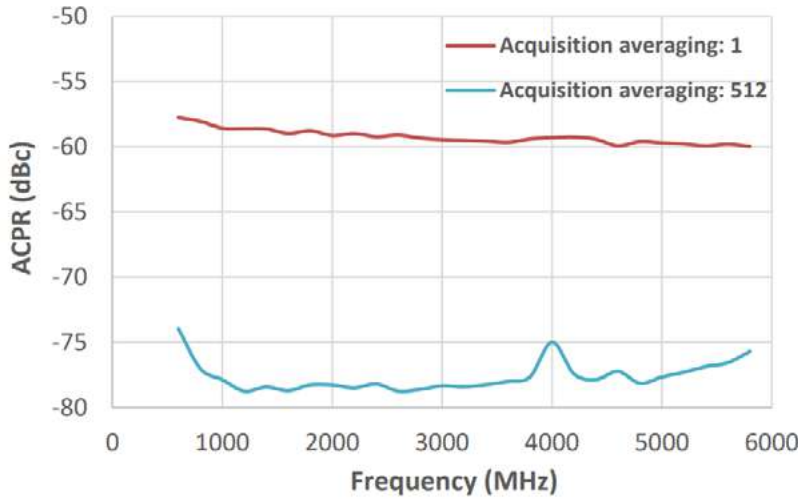

*LTE performances vs. frequency
with 20MHz bandwidth 10dB PAPR
Source power -15dBm
@491.52MSa/s*

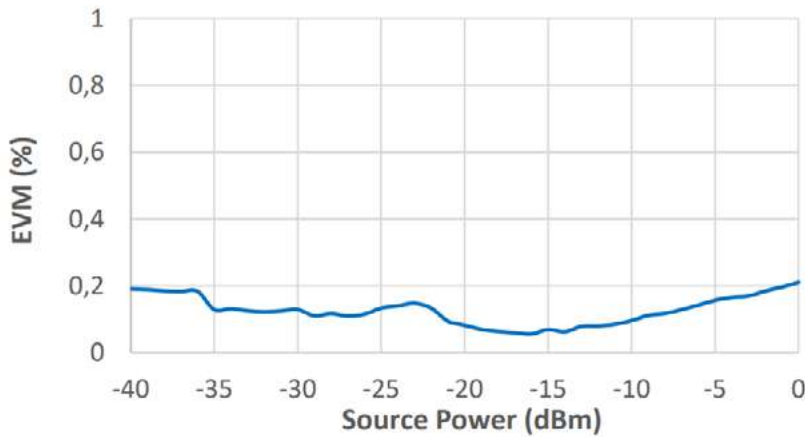


*LTE performances vs. source power
at 2.6GHz with 20MHz bandwidth
10dB PAPR
@491.52MSa/s*

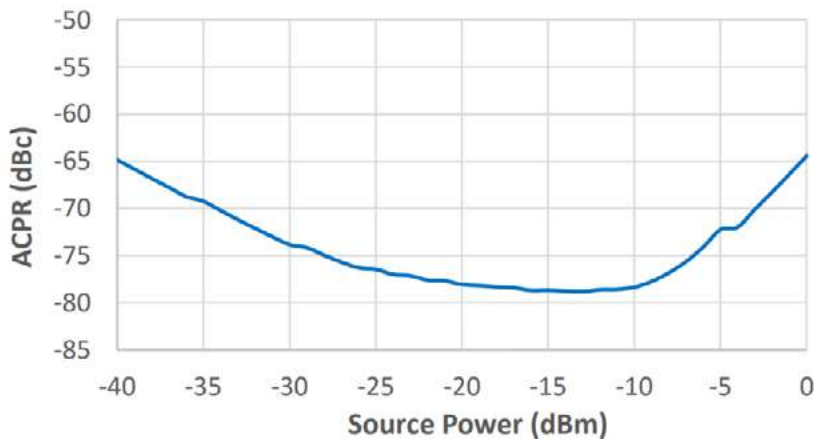


*Note: RF output loopback to RF input.
Acquisition averaging set to 512.*


5G Typical Performances

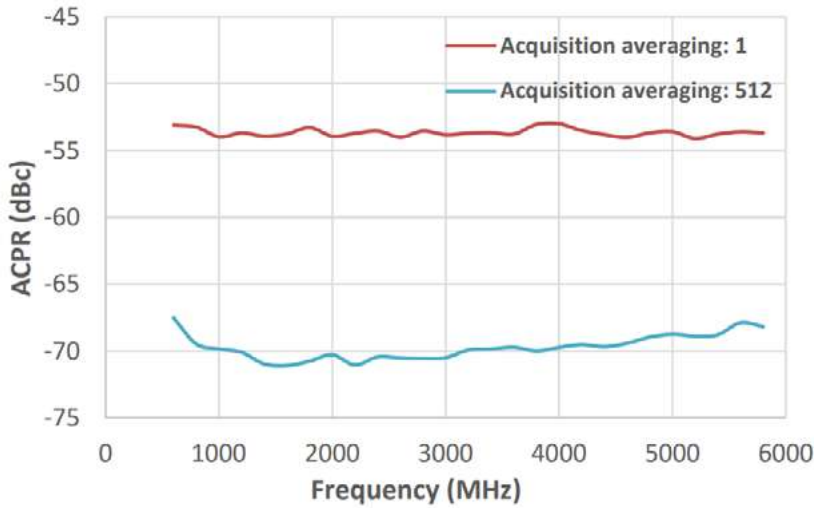

5G performances vs. frequency with 100MHz bandwidth 10dB PAPR
 Source power -15dBm
 @491.52MSa/s

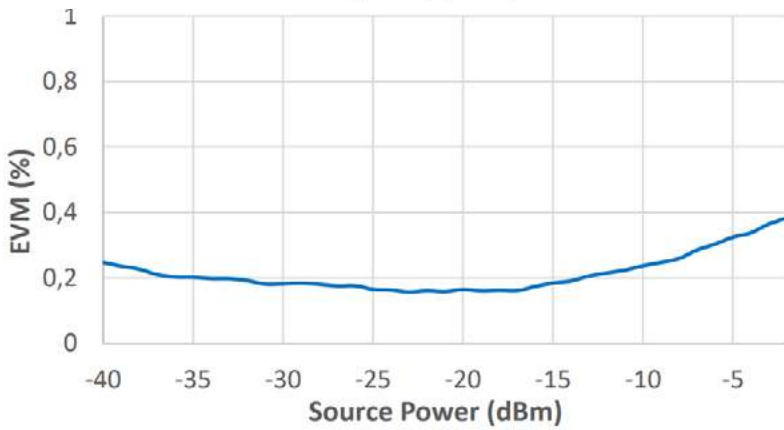

5G performances vs. source power at 3.6GHz with 100MHz bandwidth 10dB PAPR
 @491.52MSa/s

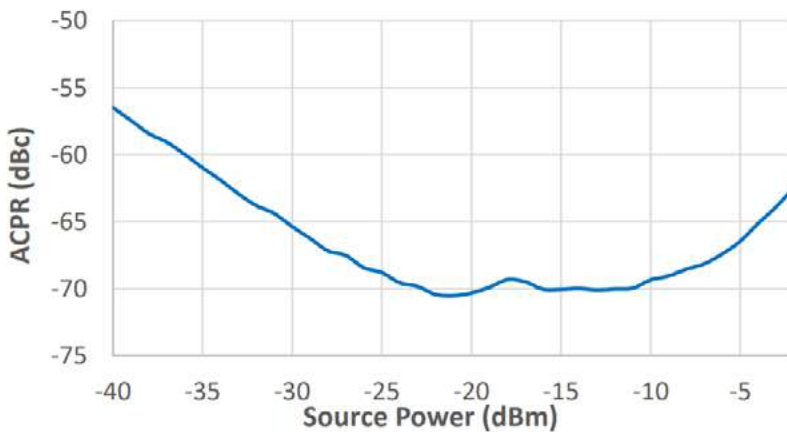

Note: RF output loopback to RF input.
 Acquisition averaging set to 512.

Warranty

Any AMCAD product comes with a two-year parts and labor warranty, when returned to our workshops. A phone support service is also available for the same period.

At the end of the initial two-year period, a further contract can be subscribed, including:

- a preventive functional check and calibration of the modules (onsite or in our workshop)
- a further two-year warranty period


Quality Regulations & Environment

AMCAD Systems and all modules are compliant to the applicable European directive and hold the CE mark.

- Products are designed and manufactured in France.
- Serial number-based lifecycle management
- All products are 100% tested (test reports on demand)
- AMCAD only uses RoHS compliant components and does not use substances banned by the COSHH regulation.

- AMCAD complies with the relevant national regulations related to the safety and health of its employees against hazardous substances.
- As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice.

CONTACT US

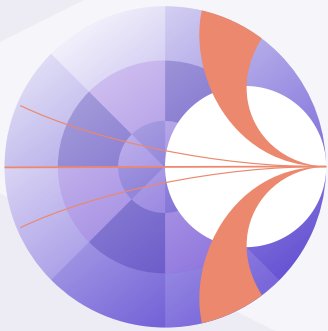

AMCAD SAS

Bâtiment Galiléo | 20 rue d'Atlantis, 87068 Limoges FRANCE

Email: sales@amcad-mw.com

Phone: +33 5 61 54 81 30

*This document may not be reproduced, modified, adapted, published, translated, in any way, in whole or in part, or disclosed to a third party without the prior written consent of AMCAD SAS
© Amcad 2024*